


Slide Retainer

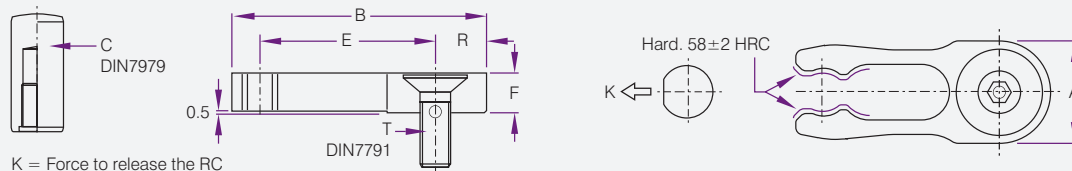

K = Force to release the RC

Slide Retainers

Mat.: 1.8159


Hardened 45 ± 3HRC

Patented System

Less machining for installation compared to similar products on the market. Minimum space required for installation. Reduces costs in tool downtime. Offers a standard solution to the moulder.

Product Code	A	B	C	E	F	G	H	K	R	T
RC.123006	12	30	6x20	21	5	4	16	5 Kg	6	M5x16
RC.164008	16	40	8x20	28	6	5	15	7 Kg	8	M6x25
RC.205010	20	50	10x24	34	8	6	17	14 Kg	10	M8x30
RC.246012	24	60	12x32	42	10	7	23	21 Kg	12	M10x40
RC.328012	32	80	16x40	56	12	9	27	28 Kg	16	M12x50
RC.328016	32	80	16x40	56	16	9	25	38 Kg	16	M12x50

Slide Holding Devices - Z5129

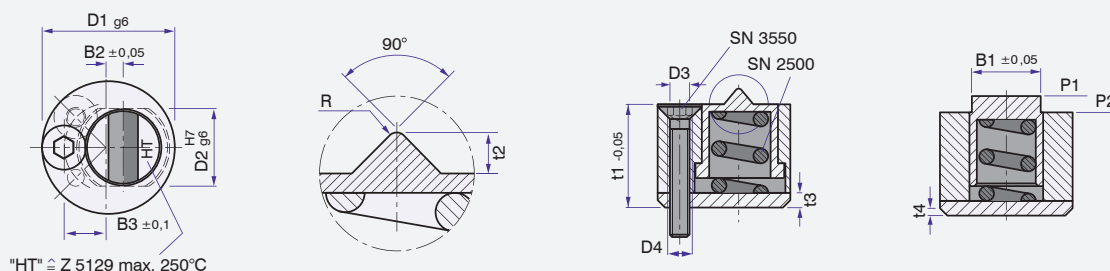

"HT" ≅ Z 5129 max. 250°C

Mat. -Nr. 1.2842/58 + 2HRC

Order: Z5129 - D1

D1	B1	B2	B3	t1	t2	t3	t4	D2	D3	D4	R	P1(N)	P2(N)	SN 2500	SN3550
13	6,6	1,4	4,3	10	1,0	1,6	0,35	7	2,2	M3	0,35	28	34	5-12	M2-16
18	9,6	2,0	6,0	14	1,8	2,0	0,50	10	3,2	M4	0,5	38	42	8-16,5	M3-20
27	14,4	3,0	9,0	21	2,8	3,0	0,50	15	4,3	M5	0,75	38	92	11,6-18,5	M4-25