Date Stamp

Mat.: INOX. 1.4034 - Hard. 51 ± 3 HRC
Maximum working temperature 150°C. Patented System

Inner insert is always at the same level as the body of the date stamp. Wide range of diameters. Only a H7 pocket required for assembly. No downtime when changing inserts. Internal mechanism guarantees secure replacement of inserts.

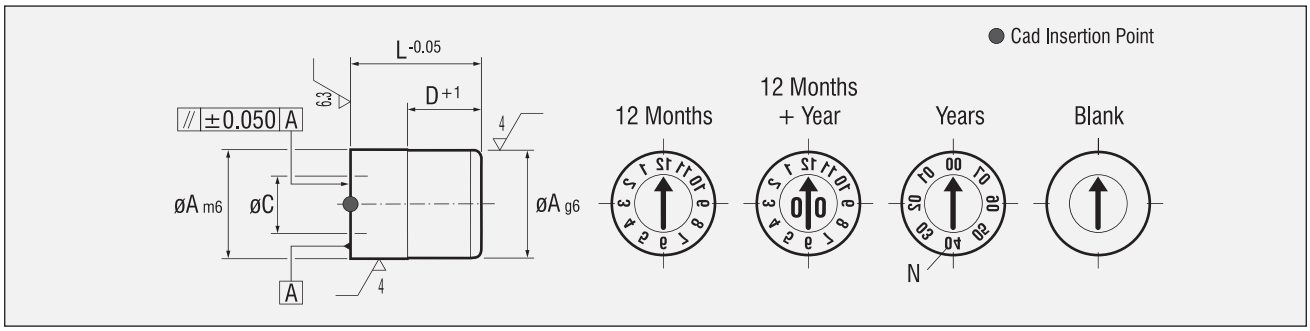

12 Months	12 Mon. + Yr	Years	Blank	A	C	D	E	L	N
CFA.0422SF	FA.042212-..	FA.042204-..	FA.042200	4	2.2	6	3.5	12	4
CFA.0530SF	FA.053012-..	FA.053004-..	FA.053000	5	3	6	3.5	12	4
CFA.0632SF	FA.063212-..	FA.063205-..	FA.063200	6	3.2	12	4	20	5
CFA.0847SF	FA.084712-..	FA.084705-..	FA.084700	8	4.7	12	6	20	5
CFA.1057SF	FA.105712-..	FA.105706-..	FA.105700	10	5.7	12	8	20	6
CFA.1267SF	FA.126712-..	FA.126708-..	FA.126700	12	6.7	12	10	20	8
CFA.1687SF	FA.168712-..	FA.168710-..	FA.168700	16	8.7	12	12	20	10
CFA.2007SF	FA.200712-..	FA.200710-..	FA.200700	20	10.7	12	14	20	10

Important: Indicate the desired year after the reference. Special engraving available on request.

Date Insert

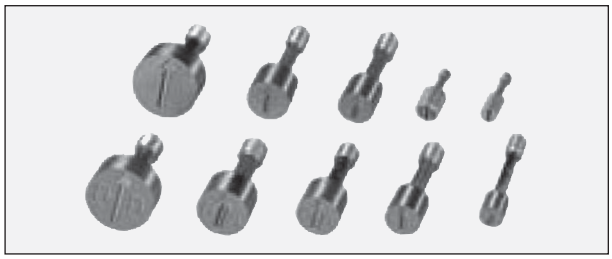

Mat.: INOX. 1.4034
Hardened 51 ± 3 HRC.
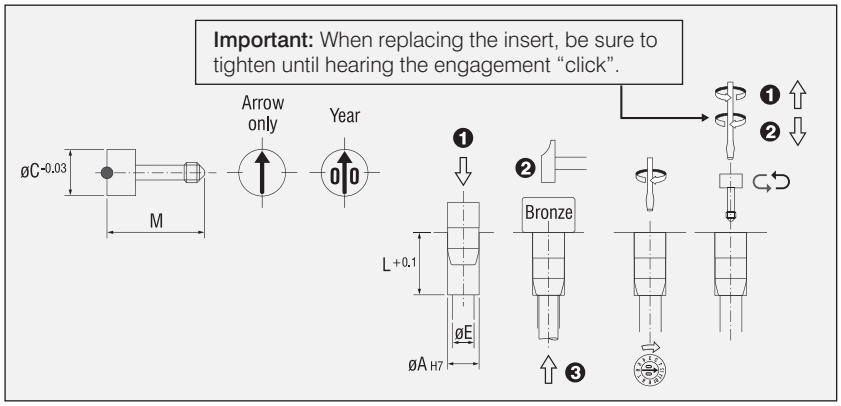
Arrow only	Year	C	M
CIA.2275SF	IA.2275..	2.2	7.5
CIA.3075SF	IA.3075..	3	7.5
CIA.3217SF	IA.3217..	3.2	17
CIA.4717SF	IA.4717..	4.7	17
CIA.5717SF	IA.5717..	5.7	17
CIA.6717SF	IA.6717..	6.7	17
CIA.8717SF	IA.8717..	8.7	17
CIA.1007SF	IA.1007..	10.7	17